



Aluminum Level Sight Windows

ASW, ASW-GV Series

- Aluminum 11S Nut
- Polyamide Lens
- 1/2" through 1 1/4" BSPP
- Fiber Gasket
- 150 PSI Standard
- 212°F Standard
- Buna Seals Standard
- Compatible with oil, gasoline, lubricants, some solvents and chemicals


Options

- Viton Seals (300°F)
- Glass Lens (300 PSI)



ASW

ASW-GV

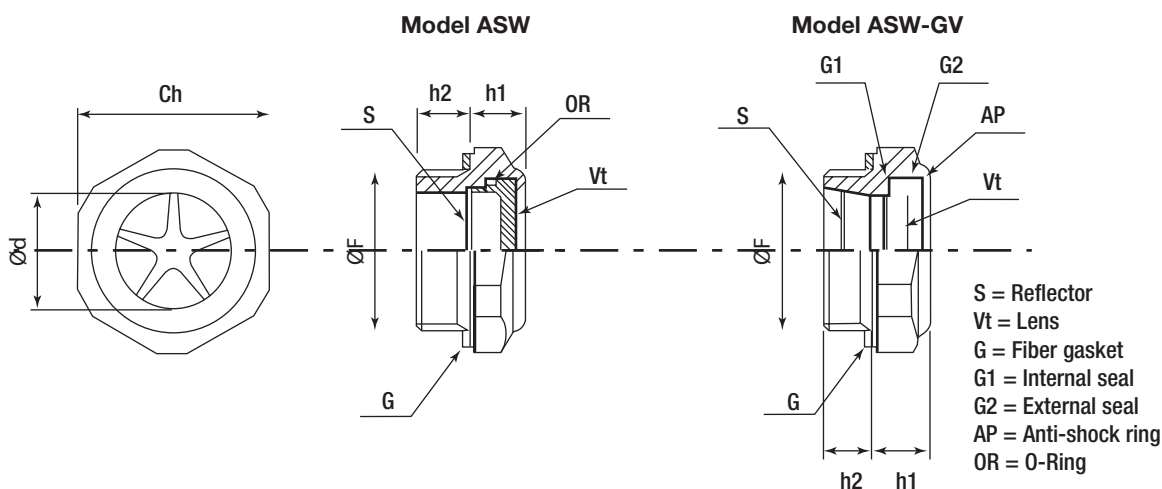

Dimensional Detail

OPEN VIEW	BSPP PORT F		Ch	d	h1	h2	MAX PRESSURE (PSI)	MAX TEMPERATURE (F°)	OPTIONAL LOCKNUT
ASW-8	1/2	IN MM	1.06 27	0.63 16	0.39 10	0.35 9	150	212	LN-8
ASW-12	3/4	IN MM	1.26 32.00	0.79 20.00	0.35 9.00	0.47 12.00	150	212	LN-12
ASW-16	1	IN MM	1.57 40	1.02 26	0.43 11	0.43 11	150	212	LN-16
ASW-20	1 1/4	IN MM	1.97 50	1.34 34	0.55 14	0.47 12	150	212	LN-20
ASW-8-GV	1/2	IN MM	1.06 27	0.47 12	0.43 11	0.35 9	300	300	LN-8
ASW-12-GV	3/4	IN MM	1.26 32	0.63 16	0.39 10	0.43 11	300	300	LN-12
ASW-16-GV	1	IN MM	1.57 40	0.91 23	0.43 11	0.43 11	300	300	LN-16

Consult factory for 1/4", 3/8" BSPP ASW-4, ASW-6

Use LN Series Lock Nuts for through the reservoir wall installation (order separately).

Ordering Code

ASW — 12 — *

SERIES	SIZE	OPTIONS	
ASW	8	OMIT	NO OPTIONS
	12	V	VITON
	16	G	GLASS
	20		