




Rubber Bushings

LRB Series

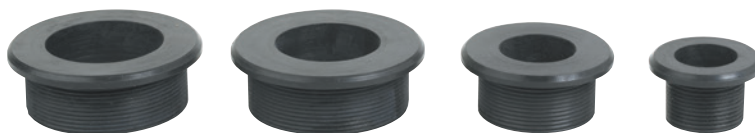


Specifications

- 70 durometer nitrile rubber
- 1/8" to 2" pipe and tube diameters
- Compatible with mineral & petroleum based fluids
- Available in packages of 10
- 65°F to + 250°F operating temperature

A comprehensive range of rubber bushings designed to reduce vibration noise and seal pipes and tubes in the reservoir top plate. Do not use below the oil level. Provides oil-tight and dust proof sealing of hydraulic lines into the reservoir.

Dimensional Detail


Model	*B Pipe	*B Tube	*B mm	A INS	A mm	C INS	C mm	D INS	D mm
LRB-2801		1/4"	6	1.2	30	0.7	18.3	0.7	18
LRB-2802			8	1.2	30	0.7	18.3	0.7	18
LRB-2803		3/8"		1.2	30	0.7	18.3	0.7	18
LRB-2804	1/8"		10	1.2	30	0.7	18.3	0.7	18
LRB-2805		1/2"	12	1.2	30	0.7	18.3	0.7	18
LRB-2806	1/4"		14	1.6	40	1.1	28.5	0.9	24
LRB-2807			15	1.6	40	1.1	28.5	0.9	24
LRB-2808		5/8"	16	1.6	40	1.1	28.5	0.9	24
LRB-2809	3/8"			1.6	40	1.1	28.5	0.9	24
LRB-2810			18	1.6	40	1.1	28.5	0.9	24
LRB-2811		3/4"		1.6	40	1.1	28.5	0.9	24
LRB-2812			20	1.6	40	1.1	28.5	0.9	24
LRB-2813	1/2"			1.6	40	1.1	28.5	0.9	24
LRB-2814		7/8"	22	1.6	40	1.1	28.5	0.9	24
LRB-2815			25	2.2	55	1.7	42.5	0.9	24
LRB-2816	3/4"			2.2	55	1.7	42.5	0.9	24
LRB-2817			28	2.2	55	1.7	42.5	0.9	24
LRB-2818			30	2.2	55	1.7	42.5	0.9	24
LRB-2819		1 1/4"		2.2	55	1.7	42.5	0.9	24
LRB-2820	1"			2.2	55	1.7	42.5	0.9	24
LRB-2821			35	2.2	55	1.7	42.5	0.9	24
LRB-2822		1 1/2"	38	2.8	70	2.3	58.5	0.9	24
LRB-2823			42	2.8	70	2.3	58.5	0.9	24
LRB-2824	1 1/4"			2.8	70	2.3	58.5	0.9	24
LRB-2825	1 1/2"			2.8	70	2.3	58.5	0.9	24
LRB-2826		2"	50	2.8	70	2.3	58.5	0.9	24
LRB-2827	2"			3.1	80	2.7	68.5	0.9	24

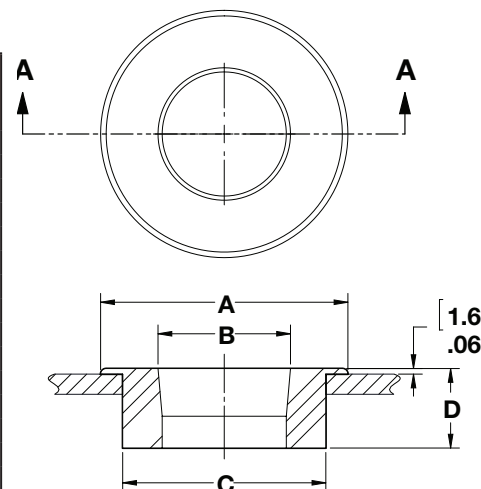


Tank Cut Out
Lubricate and insert the Downpipe

*Tolerance 0 — +0.020" 0 — +0.050mm


See website technical bulletin TB.TA08.708 for further information.

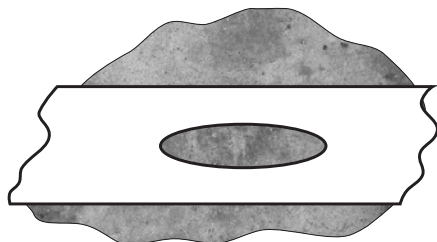

Designed to seal pipes passing through reservoir top plates. Drill the plate to the size given in column "B" and install bushings.

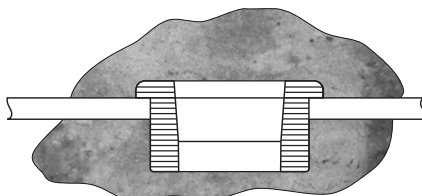

Lubricate & insert the downpipe or tube.

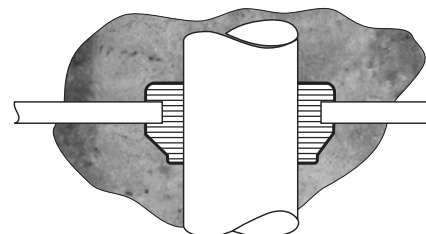

The bushing expands to form an air tight seal. Bushings are Buna 'N' for compatibility with mineral & petroleum base hydraulic fluids