



Push-On Filler Breather




Model NYPF Series

Specifications

- Maximum flow rate 17 CFM, 125 GPM @.70
- PA66 nylon cap
- 40 micron foam filter
- Operating temperature -22°F to +212°F (-30°C to +100°C)
- Compatible with petroleum base and mineral oils HH, HL, HM, HR, HV, HG
- Buna seals
- Hole tolerance .006" (.1 mm)

Options Available

- 18, 20, 26, 30 mm O. D.
- Exhaust crack pressure range 3.5 to 4.4 PSI, (.24 to .30 BAR)
- Anti-splash
- Dipstick
- 10 micron foam filter NYPF-26, 30

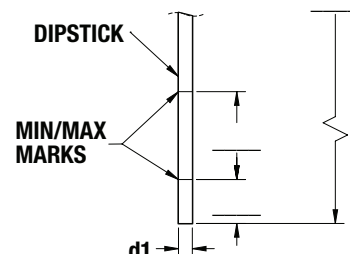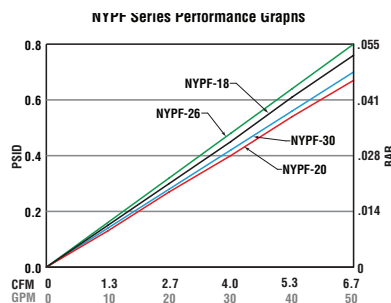

Dimensional Detail

Model No.		F	D	d	h1	d1	h2
NYPF-18	in. mm	0.71" 18	1.42" 36	0.91" 23	0.67" 17	0.16" 4	0.79" 20
NYPF-20	in. mm	0.79" 20	1.42" 36	0.94" 24	0.67" 17	0.16" 4	0.75" 19
NYPF-26	in. mm	1.02" 26	1.61" 41	1.1" 28	0.67" 17	0.16" 4	0.83" 21
NYPF-30	in. mm	1.18" 30	1.85" 47	1.3" 33	0.67" 17	0.16" 4	0.83" 21
NYPFV-18	in. mm	0.71" 18	1.42" 36	0.91" 23	0.67" 17	0.2" 5	0.79" 20
NYPFV-20	in. mm	0.79" 20	1.42" 36	0.94" 24	0.67" 17	0.16" 4	0.75" 19
NYPFV-26	in. mm	1.02" 26	1.61" 41	1.1" 28	0.67" 17	0.16" 4	0.83" 21

Thread Ordering Code

NYPF — 30 — 10M

Models	
NYPF	Standard
AS-NYPF	Anti-splash
NYPFV	EXHAUST VALVE

ADD AS - As prefix for Anti-splash
ADD DIP Suffix for Dipstick
NYPFV has 3.6 PSI one way check valve
See dipstick reference chart page 73b

Size
18
20
26
30

Filtration	
Omit	40 Micron
10M	10 Micron

Options	
Omit	None
Dip	Specify Length

30 Not available in vent option

Eye Handle Dipsticks

Model LDP Series

- PA66 nylon eye handle
- Operating temperature -22°F to +212°F (-30°C to +100°C)
- Compatible with petroleum and mineral based fluids
- Cylindrical steel dipstick standard
- Buna seals 70 durometer

Options Available

- Single o-ring handle 14, 18, 20,
- Double o-ring handle 12, 14, 18, 20
- Spring steel blade dipstick
- Vent hole in handle (14) 2.25mm (18, 20) 2.5mm

Dimensional Detail

Model No		F	D	d	H2	H1
LDP-1-14	in. mm	0.55" 14	1.06" 27	0.51" 13	0.51" 13	1.34" 34
LDP-1-18	in. mm	0.71" 18	1.26" 32	0.55" 14	0.67" 17	1.77" 45
LDP-1-20	in. mm	0.79" 20	1.26" 32	0.55" 14	0.71" 18	1.75" 44.5
LDP-2-12	in. mm	0.47" 12	1.18" 30	0.55" 14	0.79" 20	1.42" 36
LDP-2-14	in. mm	0.55" 14	1.06" 27	0.51" 13	0.79" 20	1.34" 34
LDP-2-18	in. mm	0.71" 18	1.3" 33	0.55" 14	0.83" 21	1.73" 44
LDP-2-20	in. mm	0.79" 20	1.38" 35	0.63" 16	0.83" 21	1.81" 46

Assembly Ordering Code

LDP — 2 — 18



ORINGS	
1	(1) O-Ring
2	(2) O-Ring

Size	
12	2 O-Ring ONLY
14	1 OR 2 O-Ring
18	1 OR 2 O-Ring
20	1 OR 2 O-Ring

Omit	7.2" STD DIP
DIP	Specify Length

30 Not available in vent option

Add V Suffix for Breather Hole; Except Not Available On LDP-2-12 (Not available)

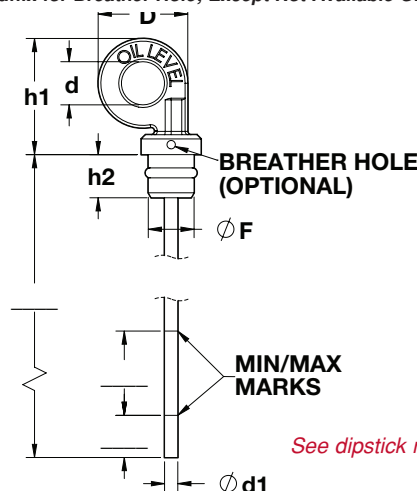

See dipstick reference chart page 73b



Dipstick reference chart

	Series	Markings	Type of Dipstick	Page	Lead Time
Quantity	NY, NY-LVB, NYF, LDP			17, 24, 30b	
1-24	Standard Length	No Markings	Cylindrical		2 Weeks
25-99	Cut to Length	No Markings	Cylindrical		2 Weeks
100-249	Cut to Length	Hash Markings	Cylindrical		4-6 Weeks
250+	Cut to Length	Hash Markings	Cylindrical		4-6 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks
Quantity	NYPF, NYPO, LDP	Markings	Type of Dipstick	34, 35b	
1-24	Standard Length	No Markings	Cylindrical		2 Weeks
25-99	Cut to Length	No Markings	Cylindrical		2 Weeks
100-249	Cut to Length	Hash Markings	Cylindrical		4-6 Weeks
250+	Cut to Length	Hash Markings	Cylindrical		4-6 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks
Quantity	NY-B, XLPO	Markings	Type of Dipstick	9, 34b	
1-24	Standard Length	No Markings	Blade		2 Weeks
25-99	Cut to Length	No Markings	Blade		2 Weeks
100-249	Cut to Length	Laser Markings	Blade		4-6 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks
Quantity	XL, 3 & 4, caps	Markings	Type of Dipstick	5, 6, 7b	
1-24	Standard Length	No Markings	Blade		2 Weeks
25-99	Cut to Length	No Markings	Blade		2 Weeks
100-249	Cut to Length	Stamp Markings	Blade		4-6 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks
Quantity	BF, LMB	Markings	Type of Dipstick	20, 22b	
1-24	Standard Length	No Markings	Blade		2 Weeks
25-99	Cut to Length	No Markings	Blade		4-6 Weeks
100-249	Cut to Length	Stamp Markings	Blade		8 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks
Quantity	ABFT, AFBB, AFBM	Markings	Type of Dipstick	23, 26b	
1-24	Standard Length	No Markings	Blade		4-6 Weeks
25-99	Cut to Length,	No Markings	Blade		4-6 Weeks
100-249	Cut to Length	Stamp Markings	Blade		8 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks
Quantity	NY-9-M52	Markings	Type of Dipstick	29b	
1-24	Standard Length	No Markings	Blade		4-6 Weeks
25-99	Cut to Length	No Markings	Blade		4-6 Weeks
100-249	Cut to Length	Stamp Markings	Blade		8 Weeks
250+	Cut to Length	Laser Markings	Blade		8 Weeks